




Product Catalog

Tracer™ Controller MP503 Input/Output

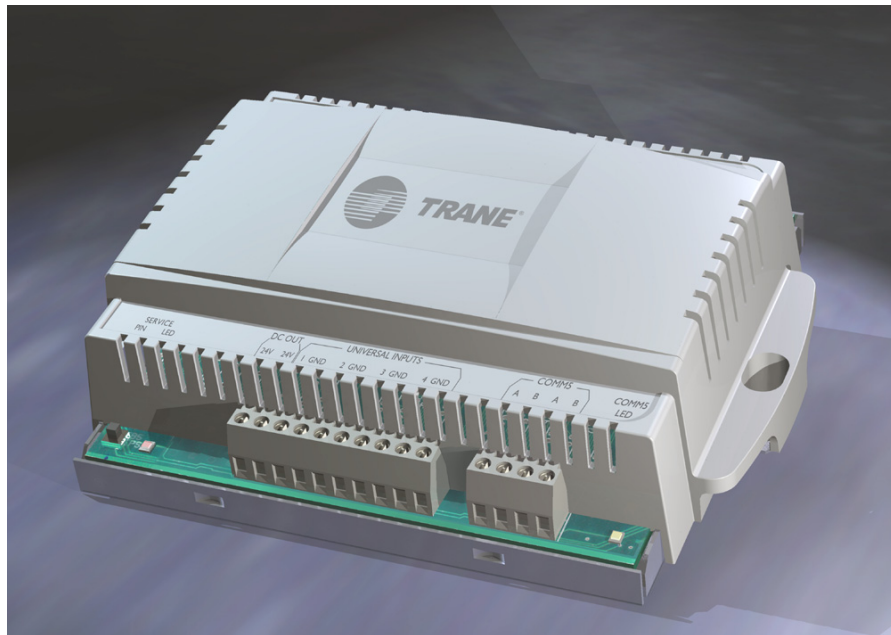

Copyright

© 2012 Trane. All rights reserved.

This document and the information in it are the property of Trane and may not be used or reproduced in whole or in part, without the written permission of Trane. Trane reserves the right to revise this publication at any time and to make changes to its content without obligation to notify any person of such revision or change.

Trademarks

Trane and its logo are trademarks of Trane in the United States and other countries. All trademarks referenced in this document are the trademarks of their respective owners.

Revision Summary

BAS-PRC009-EN (30 May 2012)

Cost Savings: Update to mount plate and metal enclosure to remove metal screw/nut and use plastic PEM nut. Change to figure illustrations.

Table of Contents

Product Overview	4
Universal Inputs	4
Binary outputs	4
Features	5
Wiring Diagram	7
Network Architecture	8
Dimensions and Specifications	9
Dimensions	9
Power	10
Operating Environment	10
Storage Environment	10
Analog-to-Digital Conversion	10
Power Supply for Inputs	10
Outputs	10
Agency Listings/Compliance	10



Product Overview

The Tracer MP503 input/output (I/O) module is a configurable, multi-purpose device used to provide data monitoring and binary control as part of a building automation system (BAS).

Communication between the module and a BAS occurs over a LonTalk communication link.

The Tracer MP503 I/O module is in a compact enclosure. It can monitor a wide variety of sensed conditions and provide equipment start/stop, or other switched states, based on communicated commands from a peer device or higher level BAS.

The Tracer MP503 I/O module includes four universal inputs and four binary outputs.

Universal Inputs

Each of the four universal inputs can be configured for use with any of the following:

- Trane 10 kW thermistor temperature sensor
- 0–20 mA or 0–10 Vdc sensor
- Binary (dry-contact) device

Binary outputs

Each of the four binary outputs can be controlled independently, as commanded from a peer control device or higher level BAS

Features

Application Flexibility

Tracer MP503 I/O modules may be located anywhere in a building, wherever up to four monitoring and/or four binary control points are needed. By connecting the Tracer MP503 to a LonTalk network, input data can be sent from and commands can be sent to the Tracer MP503.

The Tracer MP503 I/O module can be used in a wide variety of monitoring and control applications. Typical applications include monitoring of the following:

- Room, duct, or water temperatures
- Relative humidity in rooms or ductwork
- Pressure sensing, including duct static pressure and hydronic differential pressures
- Status of fan or pump operation

The outputs can be used for on/off functions including:

- Fan control
- Pump control
- Lighting control
- Staging of heating or cooling equipment.

Easy Installation

The Tracer MP503 is suitable for indoor mounting in a variety of locations. Screw terminals that are clearly labeled ensure that wires are connected quickly and accurately. A compact enclosure design simplifies installation in small spaces

Configurable Inputs

Each of the four universal inputs can be easily configured using the Trane Tracker (BMTK) light-commercial system controller or the Rover service software tool. Each input is individually selectable for input signal type, and the value of the input signal is then transmitted to any other peer device on the LonTalk network or BAS.

Internal 24 Vdc Sensor Power Supply

The Tracer MP503 has a built-in 80 mA, 24 Vdc power supply capable of powering 4–20 mA transmitting sensors. This capability eliminates the need for auxiliary power supplies. Any of the four inputs can be used with 4–20 mA sensors.

12-bit Analog-to-Digital (A/D) Conversion

The four universal inputs of the Tracer MP503 provide very precise sensing of measured variables through the use of high-resolution analog-to-digital converters.

Output Status LEDs

Light-emitting diodes (LEDs) located on the Tracer MP503 board indicate the status of each of the four binary outputs. An LED lights up whenever its respective binary output is energized. With a glance at these visual indicators, you can tell if the associated controlled device is on or off.

Output Default Options

Each of the four binary outputs has a default state provided to ensure fail-safe operation of controlled equipment in the event of a system-level communications loss. The output can be configured to default to off or on, or can maintain its current state.

Wide Ambient Operating Temperatures

The Tracer MP503 has an extended operating temperature range from –40°F to 158°F (from –40°C to 70°C). Because of this extended range, the module can be placed in locations not suitable for




Features

other building control modules. If the module is used outdoors, it should be placed in a suitable NEMA-4 enclosure (not included), for weather protection.

Interoperability

The Tracer MP503 I/O module communicates using the LonTalk FTT-10A communication protocol. The Trane implementation of this protocol is also referred to as Comm5. Comm5 allows the controllers to operate in peer-to-peer configuration and to communicate with other compatible building control systems. The module supports LonMark standard network variable types (SNVTs), allowing the module to be used with the Trane Tracer Summit and Tracker (BMTK) building control systems, as well as other building control systems that support the LonTalk protocol.


Wiring Diagram

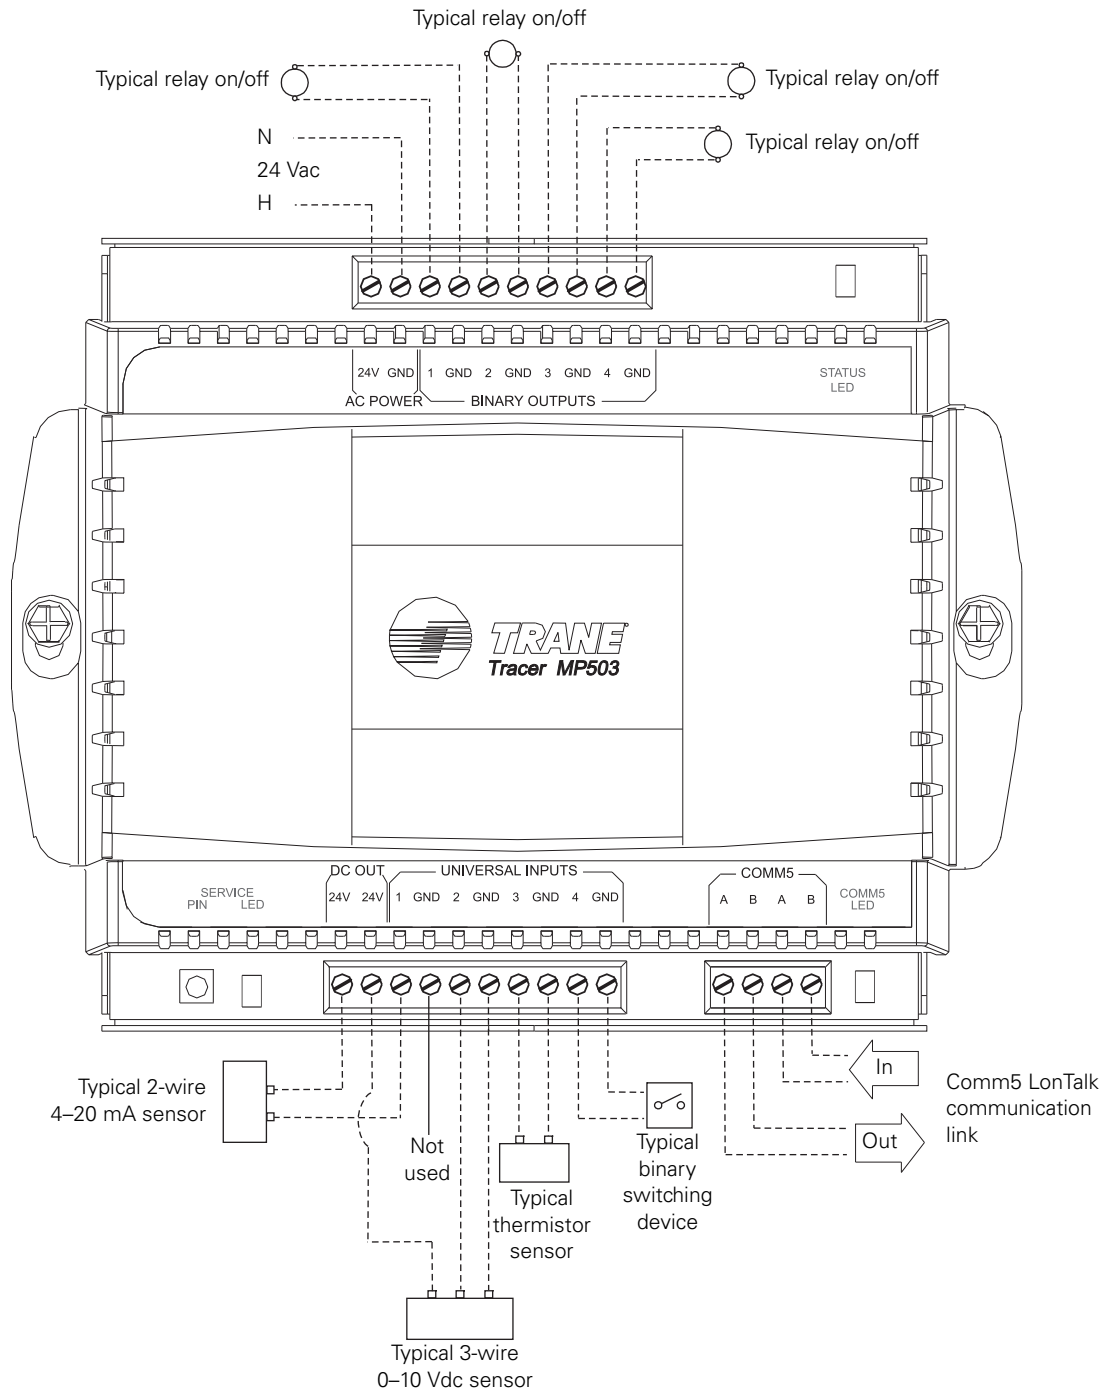

Network Architecture

The Tracer MP503 can operate on a Tracer Summit building automation system (shown below), a Tracker (BMTK) system, or as part of a peer-to-peer network.

The Tracer MP503 can be configured using the Rover service tool for Tracer controllers or other PC-based service tools compliant with the EIA/CEA-860 standard. This tool can be connected at any accessible location on the LonTalk Comm5 communication link.

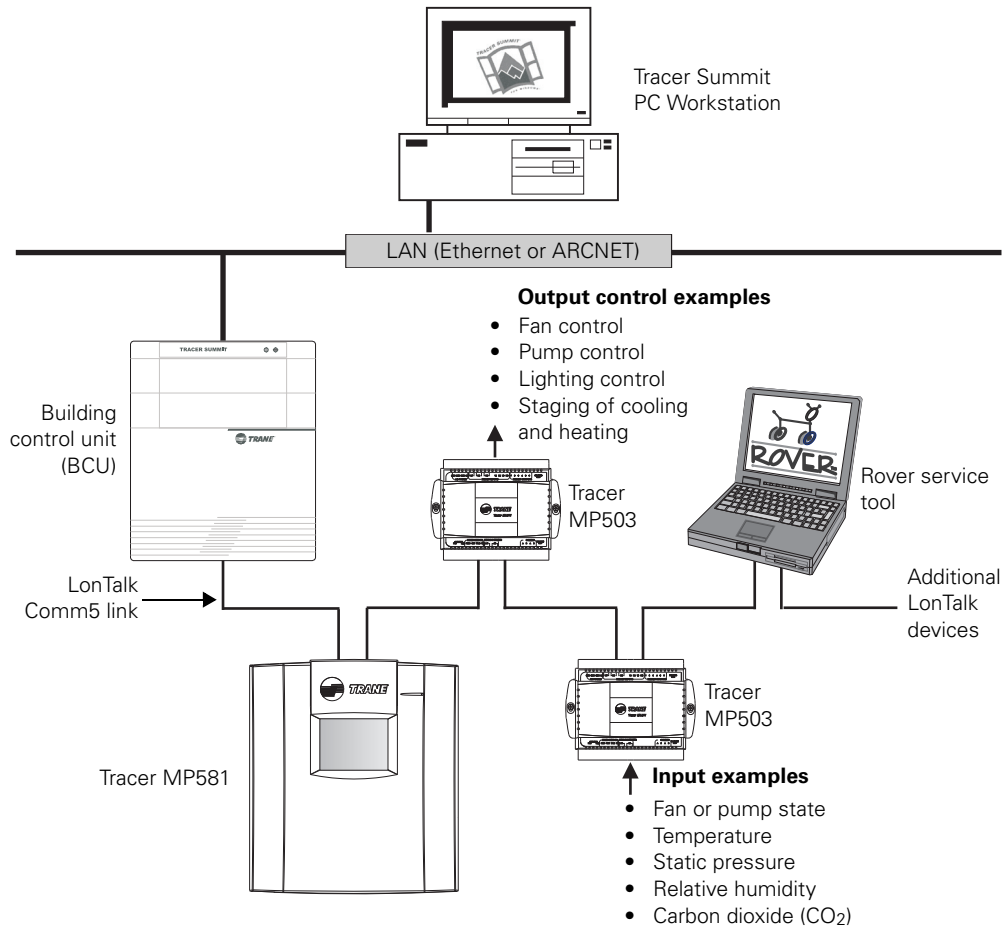

Dimensions and Specifications


Dimensions

Plastic Cover Model Dimensions

- Height: 5.375 in. (137 mm)
- Width: 6.875 in. (175 mm)
- Depth: 2.0 in. (51 mm)

Metal Enclosure Model Dimensions

- Height: 9.0 in. (229 mm)
- Width: 10.37 in. (263 mm)
- Depth: 2.25 in. (58 mm)

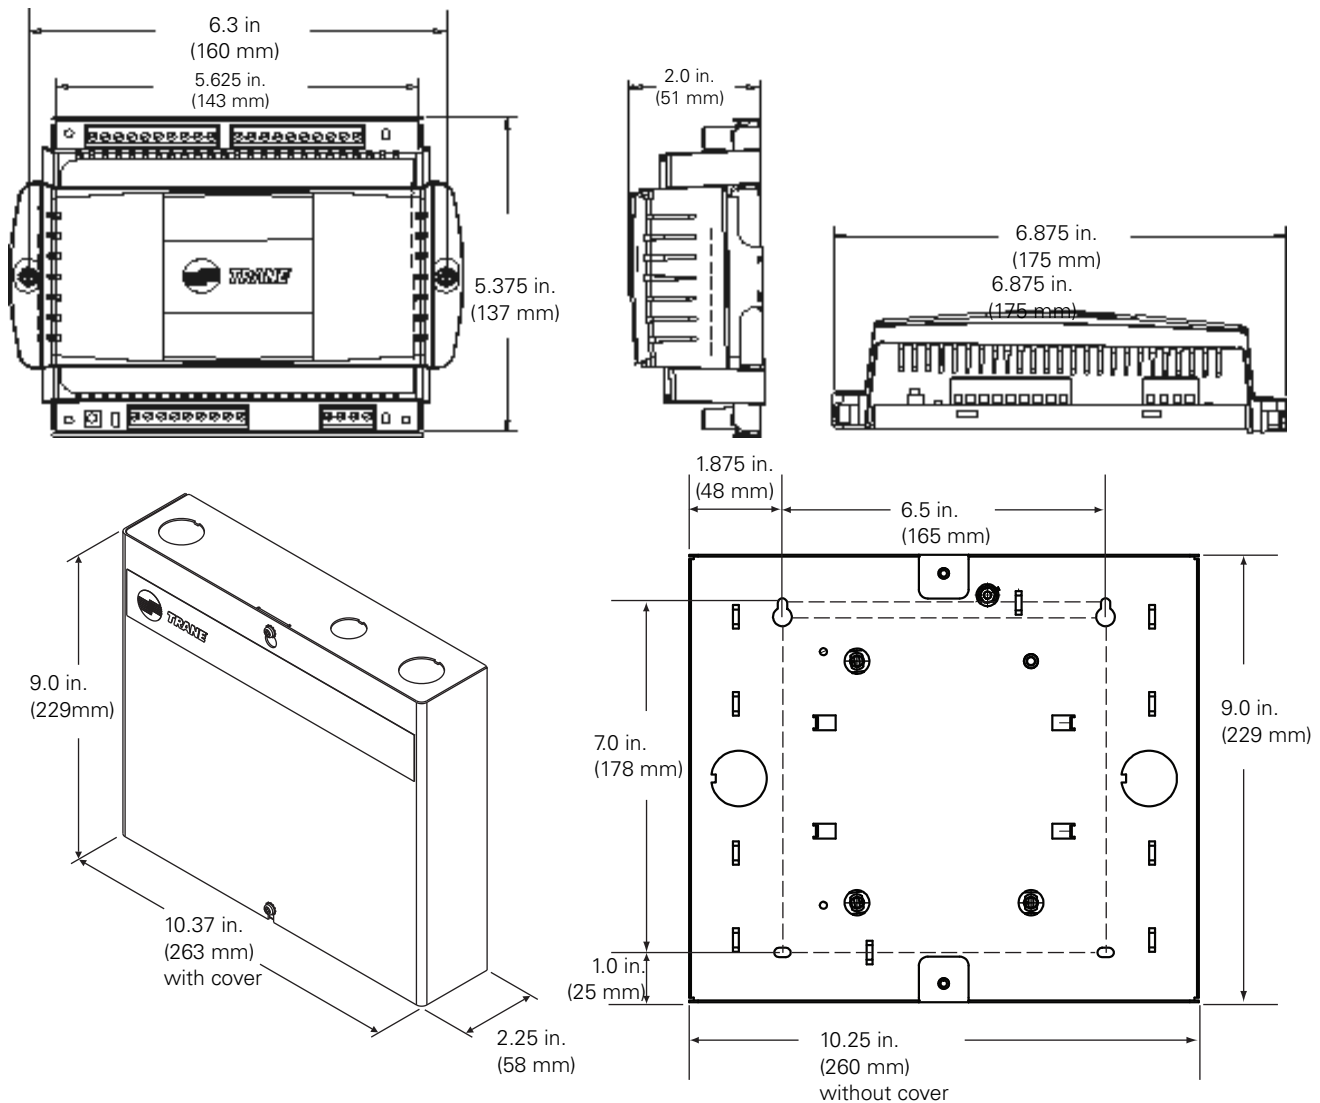

Dimensions and Specifications

Power

- Supply: 20–30 Vac (24 Vac nominal) at 50/60 Hz
- Consumption: 10 VA plus 12VA (maximum) per binary output

Operating Environment

- Temperature: From -40 to 158°F (-40 to 70°C)
- Relative humidity: From 5 to 95% non-condensing

Storage Environment

- Temperature: From -40 to 185°F (-40 to 85°C)
- Relative humidity: From 5% to 95% non-condensing

Analog-to-Digital Conversion

- 12-bit resolution

Power Supply for Inputs

- 24 Vdc, 80 mA

Outputs

- 24 Vac powered relays (12 VA maximum)

Agency Listings/Compliance

CE Immunity:

EN 50082-1:1997

CE Emissions:

EN 50081-1:1992 (CISPR 22)

EN 61000-3-2, EN 610003-3

UL/C-UL listed:

Energy management system

UL 94-5V (UL flammability rating for plenum use)

FCC Part 15, Class A



Trane optimizes the performance of homes and buildings around the world. A business of Ingersoll Rand, the leader in creating and sustaining safe, comfortable and energy efficient environments, Trane offers a broad portfolio of advanced controls and HVAC systems, comprehensive building services, and parts. For more information, visit www.Trane.com.

Trane has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.

© 2012 Trane. All rights reserved.
BAS-PRC009-EN 12 Jun 2012
Supersedes BAS-PRC009-EN (23 Aug 2010)

We are committed to using environmentally
conscious print practices that reduce waste.

